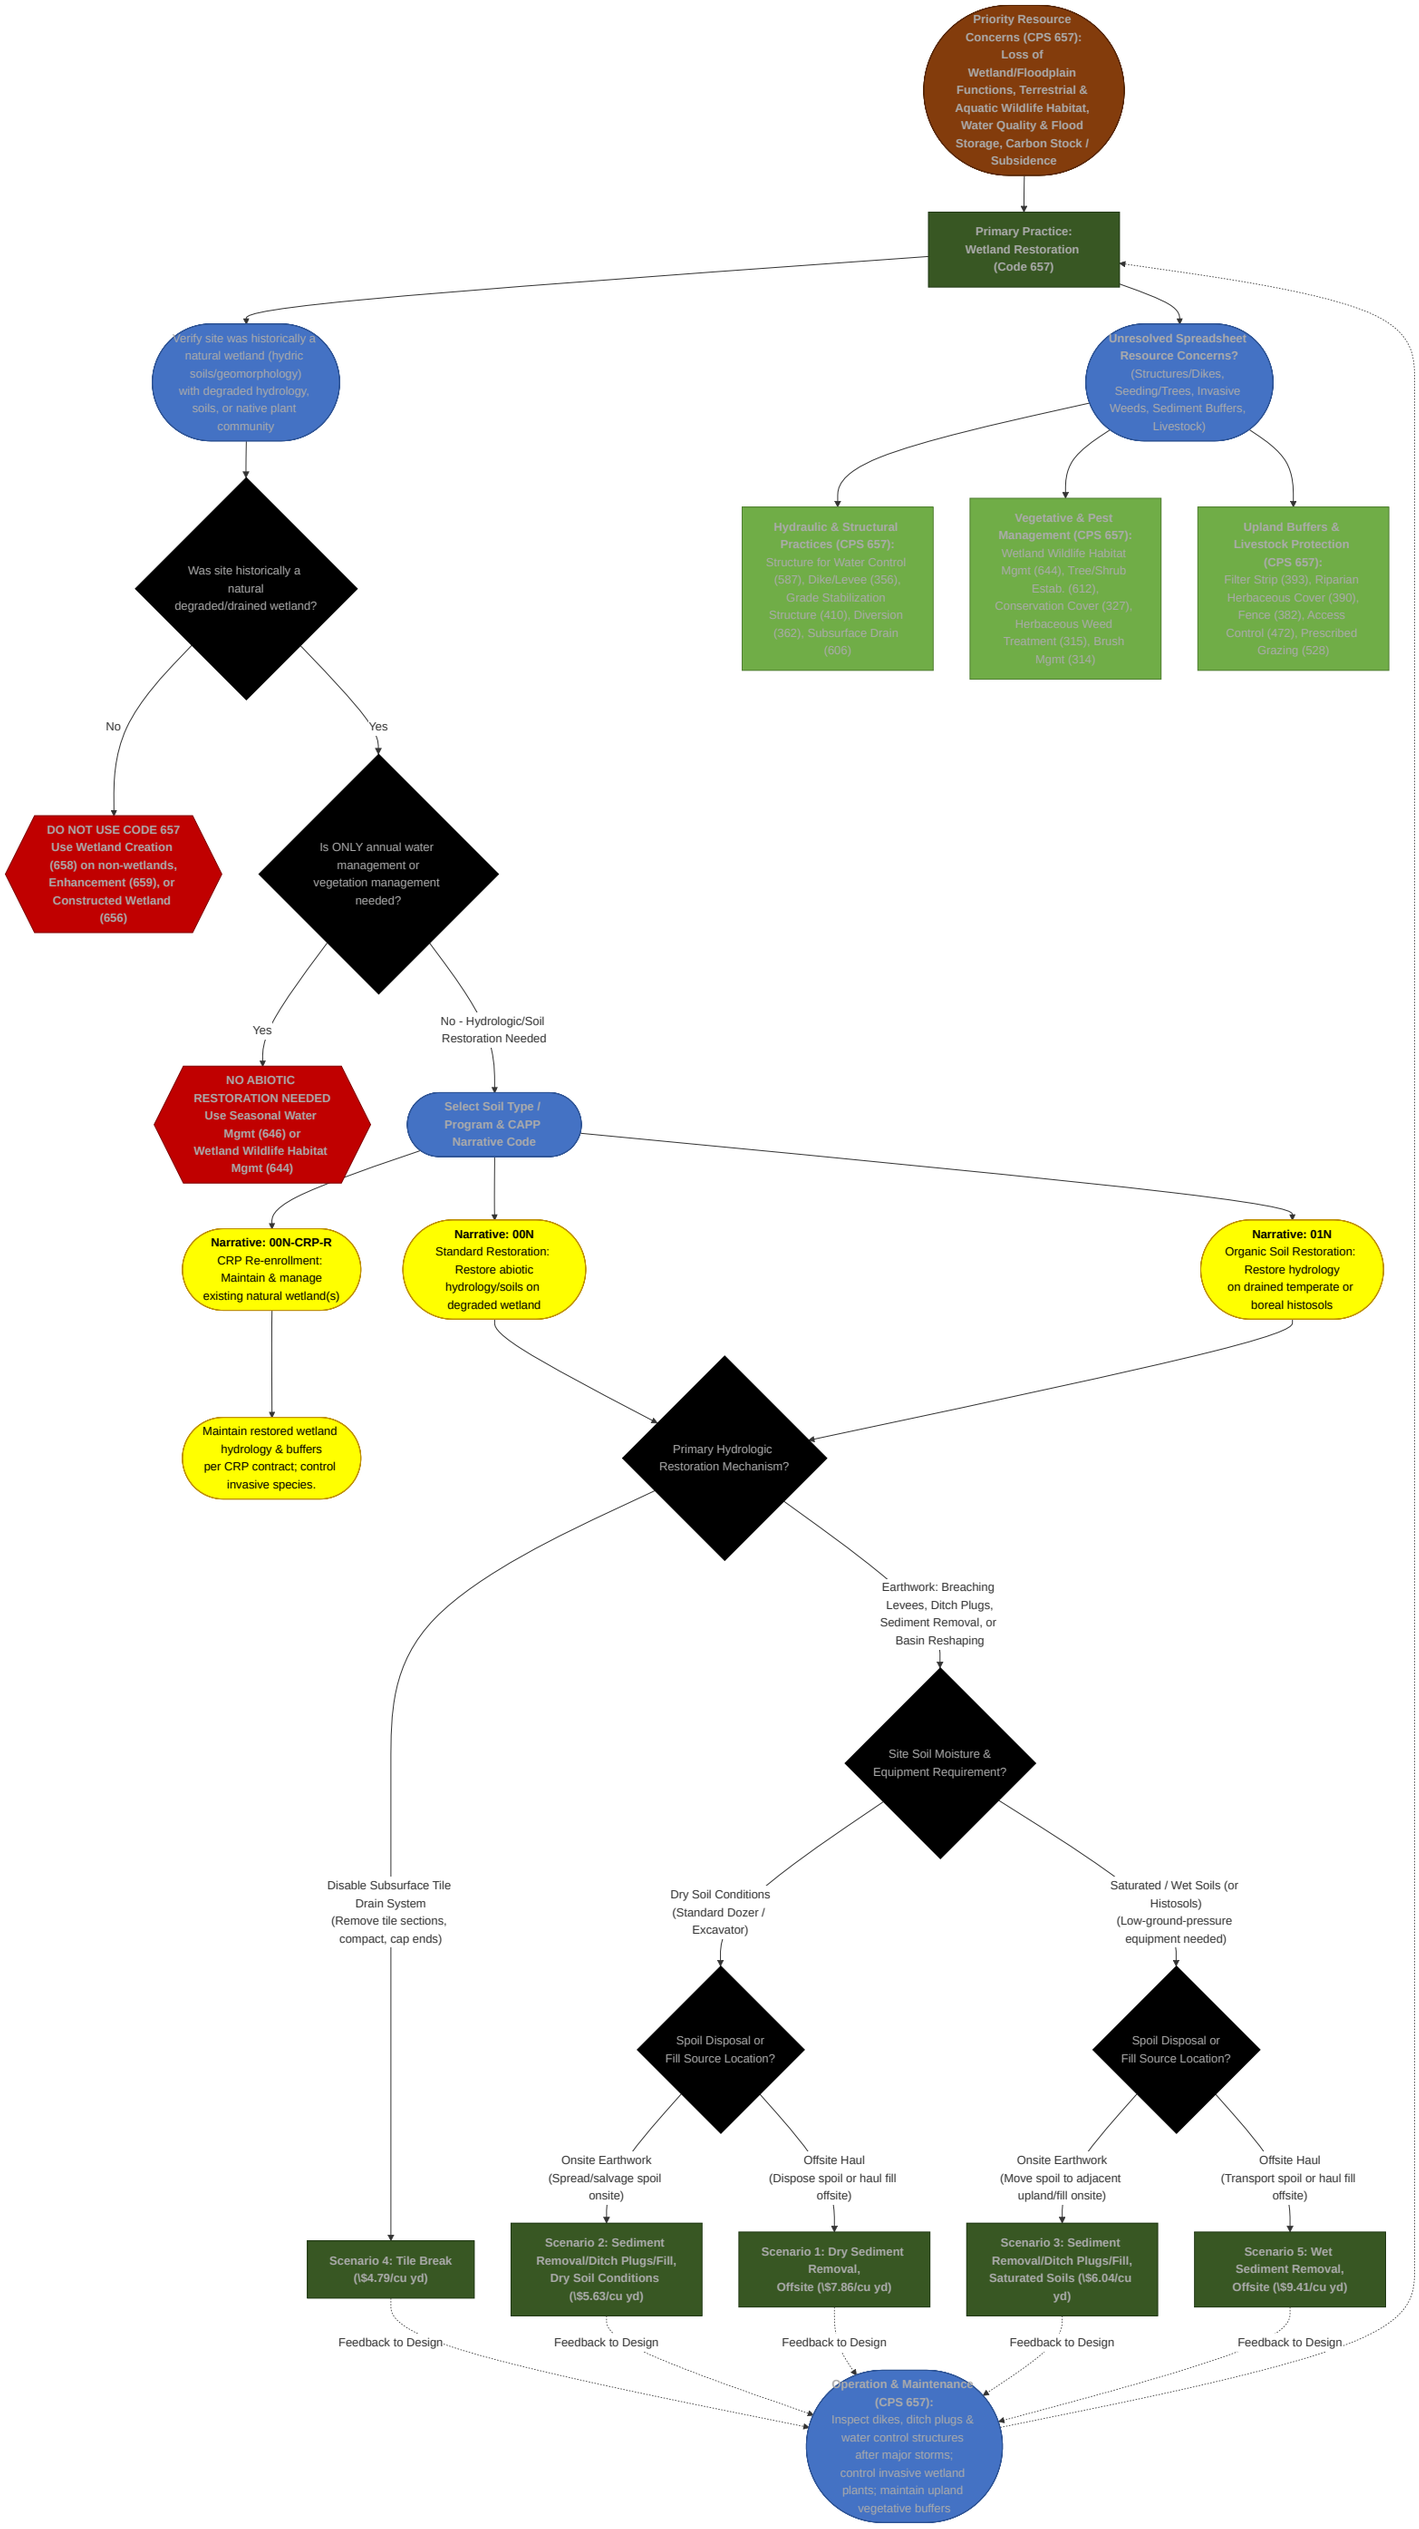

Priority Resource Concerns (CPS 657): Loss of Wetland/Floodplain Functions, Terrestrial & Aquatic Wildlife Habitat, Water Quality & Flood Storage, Carbon Stock / Subsidence
Primary Practice: Wetland Restoration (Code 657)
Verify site was historically a natural wetland (hydric soils/geomorphology) with degraded hydrology, soils, or native plant community
Unresolved Spreadsheet Resource Concerns? (Structures/Dikes, Seeding/Trees, Invasive Weeds, Sediment Buffers, Livestock)
Hydraulic & Structural Practices (CPS 657): Structure for Water Control (587), Dike/Levee (356), Grade Stabilization Structure (410), Diversion (362), Subsurface Drain (606)
Vegetative & Pest Management (CPS 657): Wetland Wildlife Habitat Mgmt (644), Tree/Shrub Estab. (612), Conservation Cover (327), Herbaceous Weed Treatment (315), Brush Mgmt (314)
Upland Buffers & Livestock Protection (CPS 657): Filter Strip (393), Riparian Herbaceous Cover (390), Fence (382), Access Control (472), Prescribed Grazing (528)
Was site historically a natural degraded/drained wetland?
No
Yes
DO NOT USE CODE 657 Use Wetland Creation (658) on non-wetlands, Enhancement (659), or Constructed Wetland (656)
Is ONLY annual water management or vegetation management needed?
Yes
No - Hydrologic/Soil Restoration Needed
NO ABIOTIC RESTORATION NEEDED Use Seasonal Water Mgmt (646) or Wetland Wildlife Habitat Mgmt (644)
Select Soil Type / Program & CAPP Narrative Code
Narrative: 00N-CRP-R CRP Re-enrollment: Maintain & manage existing natural wetland(s)
Narrative: 00N Standard Restoration: Restore abiotic hydrology/soils on degraded wetland
Narrative: 01N Organic Soil Restoration: Restore hydrology on drained temperate or boreal histosols
Maintain restored wetland hydrology & buffers per CRP contract; control invasive species.
Primary Hydrologic Restoration Mechanism?
Disable Subsurface Tile Drain System (Remove tile sections, compact, cap ends)
Earthwork: Breaching Levees, Ditch Plugs, Sediment Removal, or Basin Reshaping
Site Soil Moisture & Equipment Requirement?
Dry Soil Conditions (Standard Dozer / Excavator)
Saturated / Wet Soils (or Histosols) (Low-ground-pressure equipment needed)
Spoil Disposal or Fill Source Location?
Spoil Disposal or Fill Source Location?
Onsite Earthwork (Spread/salvage spoil onsite)
Offsite Haul (Dispose spoil or haul fill offsite)
Onsite Earthwork (Move spoil to adjacent upland/fill onsite)
Offsite Haul (Transport spoil or haul fill offsite)
Scenario 4: Tile Break (\$4.79/cu yd)
Scenario 2: Sediment Removal/Ditch Plugs/Fill, Dry Soil Conditions (\$5.63/cu yd)
Scenario 1: Dry Sediment Removal, Offsite (\$7.86/cu yd)
Scenario 3: Sediment Removal/Ditch Plugs/Fill, Saturated Soils (\$6.04/cu yd)
Scenario 5: Wet Sediment Removal, Offsite (\$9.41/cu yd)
Feedback to Design
Feedback to Design
Feedback to Design
Feedback to Design
Feedback to Design
Operation & Maintenance (CPS 657): Inspect dikes, ditch plugs & water control structures after major storms; control invasive wetland plants; maintain upland vegetative buffers