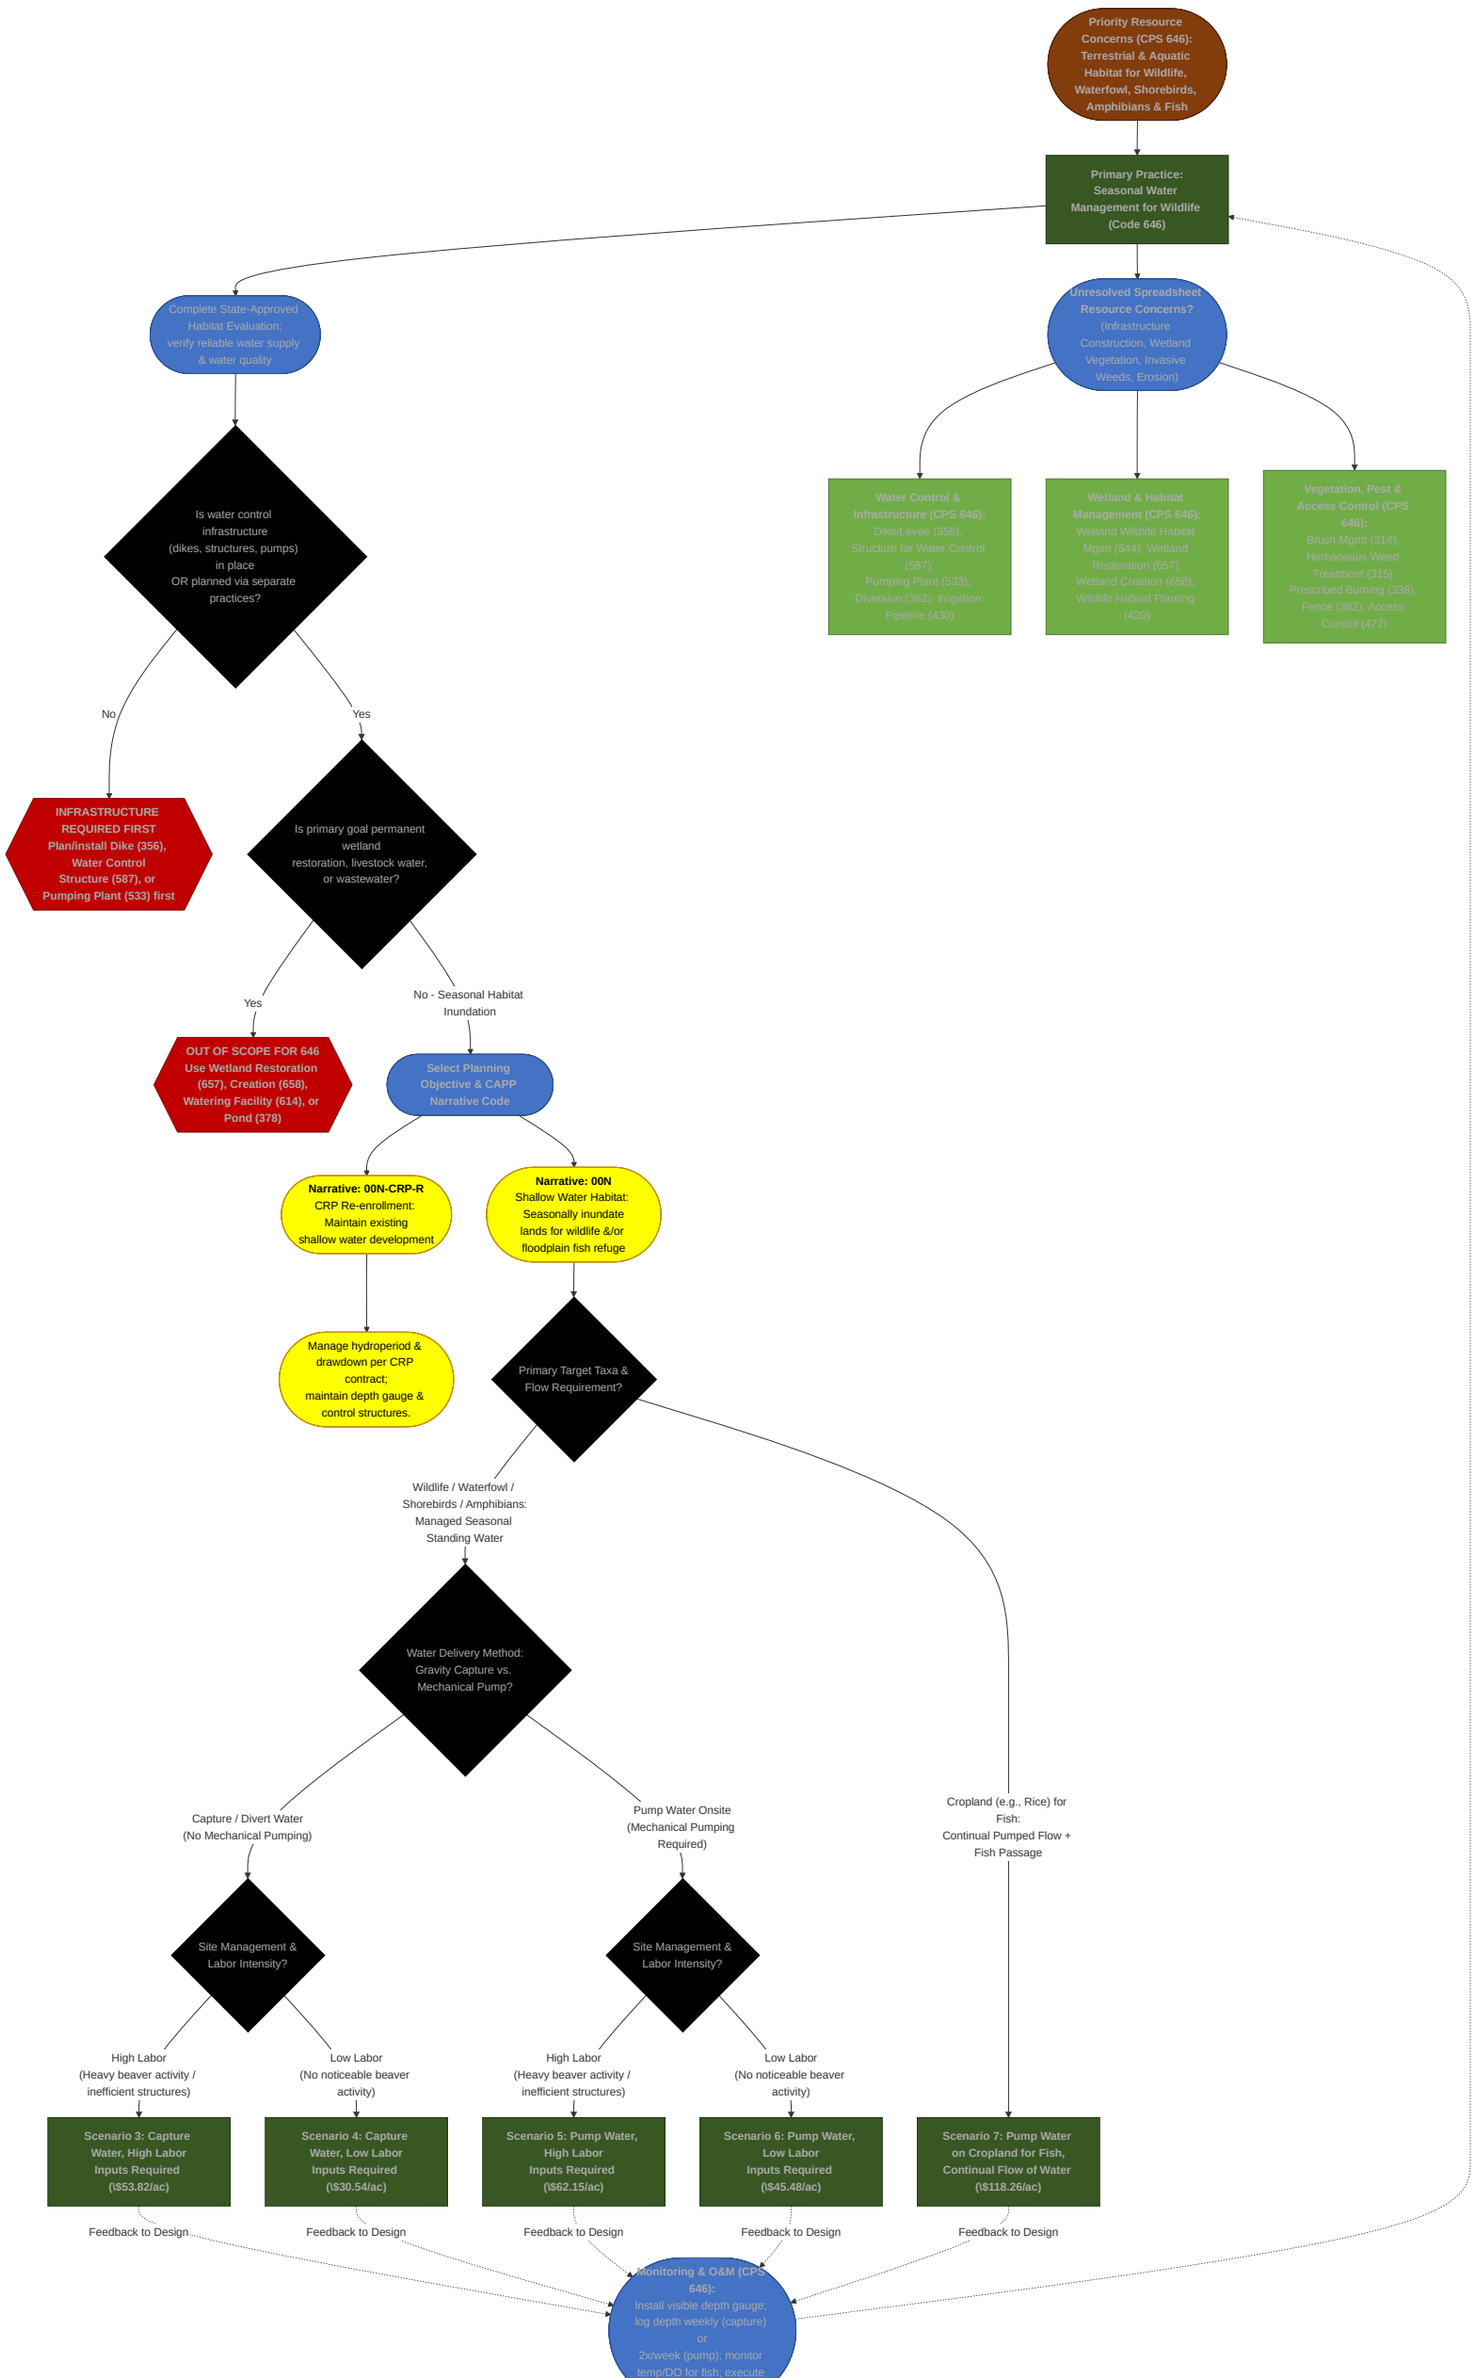

Priority Resource Concerns (CPS 646): Terrestrial & Aquatic Habitat for Wildlife, Waterfowl, Shorebirds, Amphibians & Fish
Primary Practice: Seasonal Water Management for Wildlife (Code 646)
Complete State-Approved Habitat Evaluation; verify reliable water supply & water quality
Unresolved Spreadsheet Resource Concerns? (Infrastructure Construction, Wetland Vegetation, Invasive Weeds, Erosion)
Water Control & Infrastructure (CPS 646): Dike/Levee (356), Structure for Water Control (587), Pumping Plant (533), Diversion (362), Irrigation Pipeline (430)
Wetland & Habitat Management (CPS 646): Wetland Wildlife Habitat Mgmt (644), Wetland Restoration (657), Wetland Creation (658), Wildlife Habitat Planting (420)
Vegetation, Pest & Access Control (CPS 646): Brush Mgmt (314), Herbaceous Weed Treatment (315), Prescribed Burning (338), Fence (382), Access Control (472)
Is water control infrastructure (dikes, structures, pumps) in place OR planned via separate practices?
No
Yes
INFRASTRUCTURE REQUIRED FIRST Plan/install Dike (356), Water Control Structure (587), or Pumping Plant (533) first
Is primary goal permanent wetland restoration, livestock water, or wastewater?
Yes
No - Seasonal Habitat Inundation
OUT OF SCOPE FOR 646 Use Wetland Restoration (657), Creation (658), Watering Facility (614), or Pond (378)
Select Planning Objective & CAPP Narrative Code
Narrative: 00N-CRP-R CRP Re-enrollment: Maintain existing shallow water development
Narrative: 00N Shallow Water Habitat: Seasonally inundate lands for wildlife &/or floodplain fish refuge
Manage hydroperiod & drawdown per CRP contract; maintain depth gauge & control structures.
Primary Target Taxa & Flow Requirement?
Wildlife / Waterfowl / Shorebirds / Amphibians: Managed Seasonal Standing Water
Cropland (e.g., Rice) for Fish: Continual Pumped Flow + Fish Passage
Water Delivery Method: Gravity Capture vs. Mechanical Pump?
Capture / Divert Water (No Mechanical Pumping)
Pump Water Onsite (Mechanical Pumping Required)
Site Management & Labor Intensity?
Site Management & Labor Intensity?
High Labor (Heavy beaver activity / inefficient structures)
Low Labor (No noticeable beaver activity)
High Labor (Heavy beaver activity / inefficient structures)
Low Labor (No noticeable beaver activity)
Scenario 3: Capture Water, High Labor Inputs Required (\$53.82/ac)
Scenario 4: Capture Water, Low Labor Inputs Required (\$30.54/ac)
Scenario 5: Pump Water, High Labor Inputs Required (\$62.15/ac)
Scenario 6: Pump Water, Low Labor Inputs Required (\$45.48/ac)
Scenario 7: Pump Water on Cropland for Fish, Continual Flow of Water (\$118.26/ac)
Feedback to Design
Feedback to Design
Feedback to Design
Feedback to Design
Feedback to Design
Monitoring & O&M (CPS 646): Install visible depth gauge; log depth weekly (capture) or 2x/week (pump); monitor temp/DO for fish; execute planned drawdown