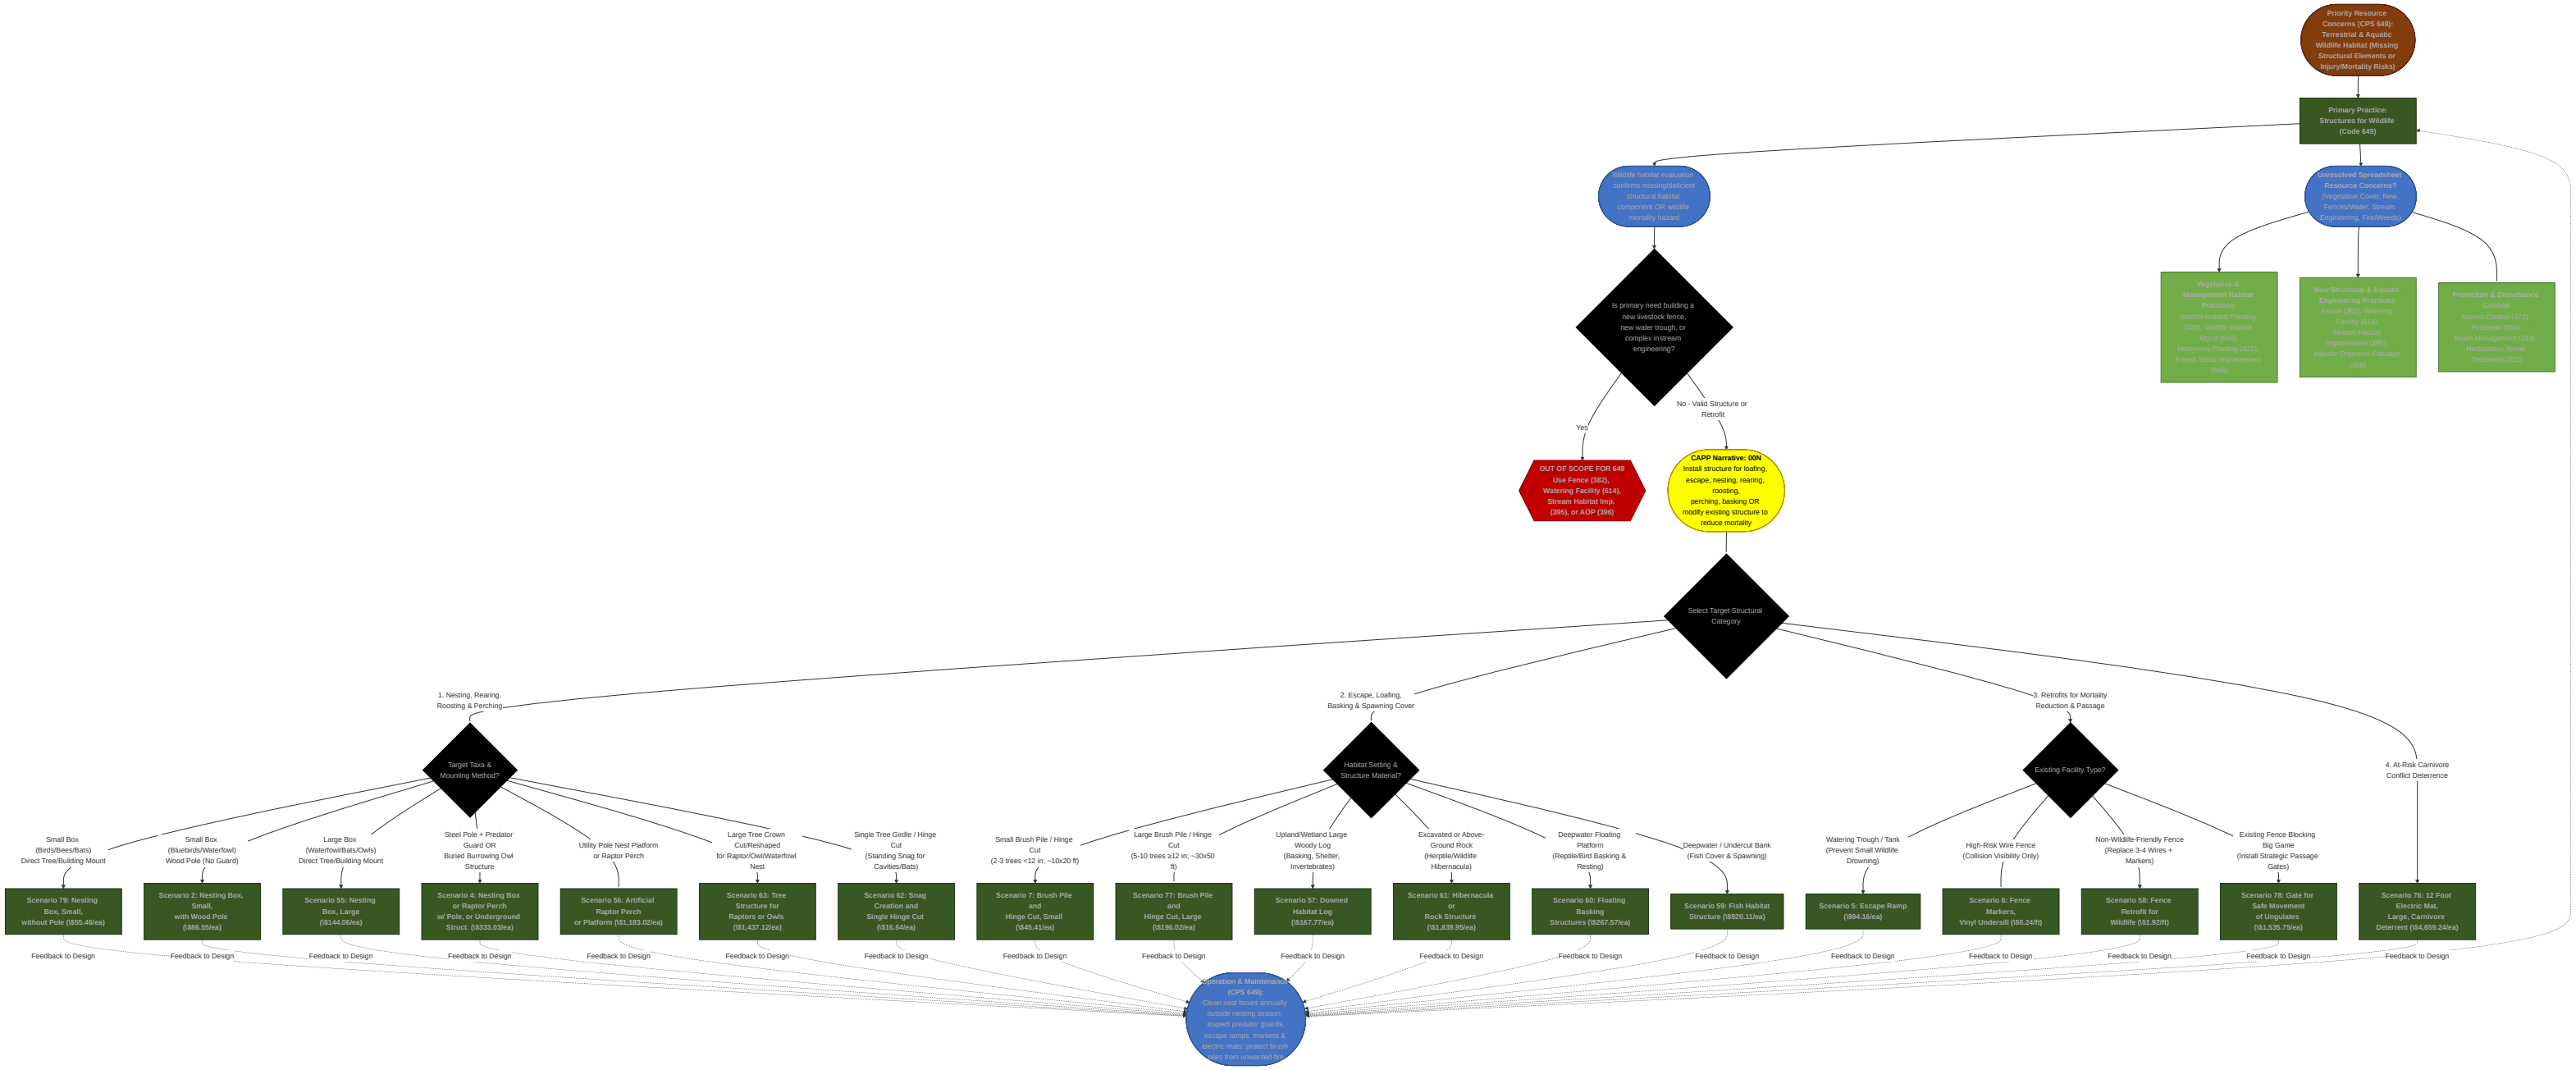
Priority Resource Concerns (CPS 649): Terrestrial & Aquatic Wildlife Habitat (Missing Structural Elements or Injury/Mortality Risks)
Primary Practice: Structures for Wildlife (Code 649)
Wildlife habitat evaluation confirms missing/deficient structural habitat component OR wildlife mortality hazard
Unresolved Spreadsheet Resource Concerns? (Vegetative Cover, New Fences/Water, Stream Engineering, Fire/Weeds)
Vegetative & Management Habitat Practices: Wildlife Habitat Planting (420), Wildlife Habitat Mgmt (645), Hedgerow Planting (422), Forest Stand Improvement (666)
New Structural & Aquatic Engineering Practices: Fence (382), Watering Facility (614), Stream Habitat Improvement (395), Aquatic Organism Passage (396)
Protection & Disturbance Control: Access Control (472), Firebreak (394), Brush Management (314), Herbaceous Weed Treatment (315)
Is primary need building a new livestock fence, new water trough, or complex instream engineering?
Yes
OUT OF SCOPE FOR 649 Use Fence (382), Watering Facility (614), Stream Habitat Imp. (395), or AOP (396)
No - Valid Structure or Retrofit
CAPP Narrative: 00N
Install structure for loafing, escape, nesting, rearing, roosting, perching, basking OR modify existing structure to reduce mortality
Select Target Structural Category
1. Nesting, Rearing, Roosting & Perching
Target Taxa & Mounting Method?
Small Box (Birds/Bees/Bats) Direct Tree/Building Mount
Scenario 79: Nesting Box, Small, without Pole (\$55.46/ea)
Small Box (Bluebirds/Waterfowl) Wood Pole (No Guard)
Scenario 2: Nesting Box, Small, with Wood Pole (\$86.55/ea)
Large Box (Waterfowl/Bats/Owls) Direct Tree/Building Mount
Scenario 55: Nesting Box, Large (\$144.06/ea)
Steel Pole + Predator Guard OR Buried Burrowing Owl Structure
Scenario 4: Nesting Box or Raptor Perch w/ Pole, or Underground Struct. (\$333.03/ea)
Utility Pole Nest Platform or Raptor Perch
Scenario 56: Artificial Raptor Perch or Platform (\$1,183.02/ea)
Large Tree Crown Cut/Reshaped for Raptor/Owl/Waterfowl Nest
Scenario 63: Tree Structure for Raptors or Owls (\$1,437.12/ea)
Single Tree Girdle / Hinge Cut (Standing Snag for Cavities/Bats)
Scenario 62: Snag Creation and Single Hinge Cut (\$16.64/ea)
2. Escape, Loafing, Basking & Spawning Cover
Habitat Setting & Structure Material?
Small Brush Pile / Hinge Cut (2-3 trees <12 in; ~10x20 ft)
Scenario 7: Brush Pile and Hinge Cut, Small (\$45.41/ea)
Large Brush Pile / Hinge Cut (5-10 trees ≥12 in; ~30x50 ft)
Scenario 77: Brush Pile and Hinge Cut, Large (\$196.02/ea)
Upland/Wetland Large Woody Log (Basking, Shelter, Invertebrates)
Scenario 57: Downed Habitat Log (\$167.77/ea)
Excavated or Above-Ground Rock (Herptile/Wildlife Hibernacula)
Scenario 61: Hibernacula or Rock Structure (\$1,839.95/ea)
Deepwater Floating Platform (Reptile/Bird Basking & Resting)
Scenario 60: Floating Basking Structures (\$267.57/ea)
Deepwater / Undercut Bank (Fish Cover & Spawning)
Scenario 59: Fish Habitat Structure (\$920.11/ea)
3. Retrofits for Mortality Reduction & Passage
Existing Facility Type?
Watering Trough / Tank (Prevent Small Wildlife Drowning)
Scenario 5: Escape Ramp (\$94.16/ea)
High-Risk Wire Fence (Collision Visibility Only)
Scenario 6: Fence Markers, Vinyl Undersill (\$0.24/ft)
Non-Wildlife-Friendly Fence (Replace 3-4 Wires + Markers)
Scenario 58: Fence Retrofit for Wildlife (\$1.92/ft)
Existing Fence Blocking Big Game (Install Strategic Passage Gates)
Scenario 78: Gate for Safe Movement of Ungulates (\$1,535.75/ea)
4. At-Risk Carnivore Conflict Deterrence
Scenario 76: 12 Foot Electric Mat, Large, Carnivore Deterrent (\$4,659.24/ea)
Feedback to Design
Operation & Maintenance (CPS 649): Clean nest boxes annually outside nesting season; inspect predator guards, escape ramps, markers & electric mats; protect brush piles from unwanted fire